



Wiring Diagram



Unit: inch/mm

For use
with
275-220
socket

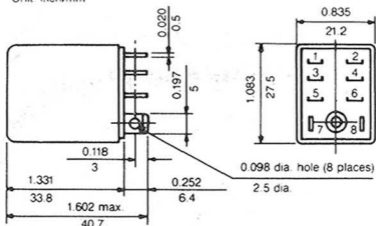

Features

- Stationary contact: silver-cadmium oxide
Movable contacts: silver-copper
- Plug-in or solder connection
- Compact size—mounts in any position

Absolute Maximum Ratings

Ambient Temperature: -45°C to $+60^{\circ}\text{C}$
Continuous Coil Voltage: 14.4VDC
Coil Dissipation: 2.3W at 20°C

Electrical Characteristics

Coil Resistance: 160 ohms $\pm 10\%$
Pull-In Voltage: 9.6VDC
Contact Rating: 15A at 125VAC
Nominal Current: 75 mA



275-218

Made in Mexico

Custom Packaged in USA for Radio Shack
A Division of Tandy Corp., Fort Worth, TX 76102